


# 23-28XL

## TRUCK/TRACTOR TOWED SCRAPER

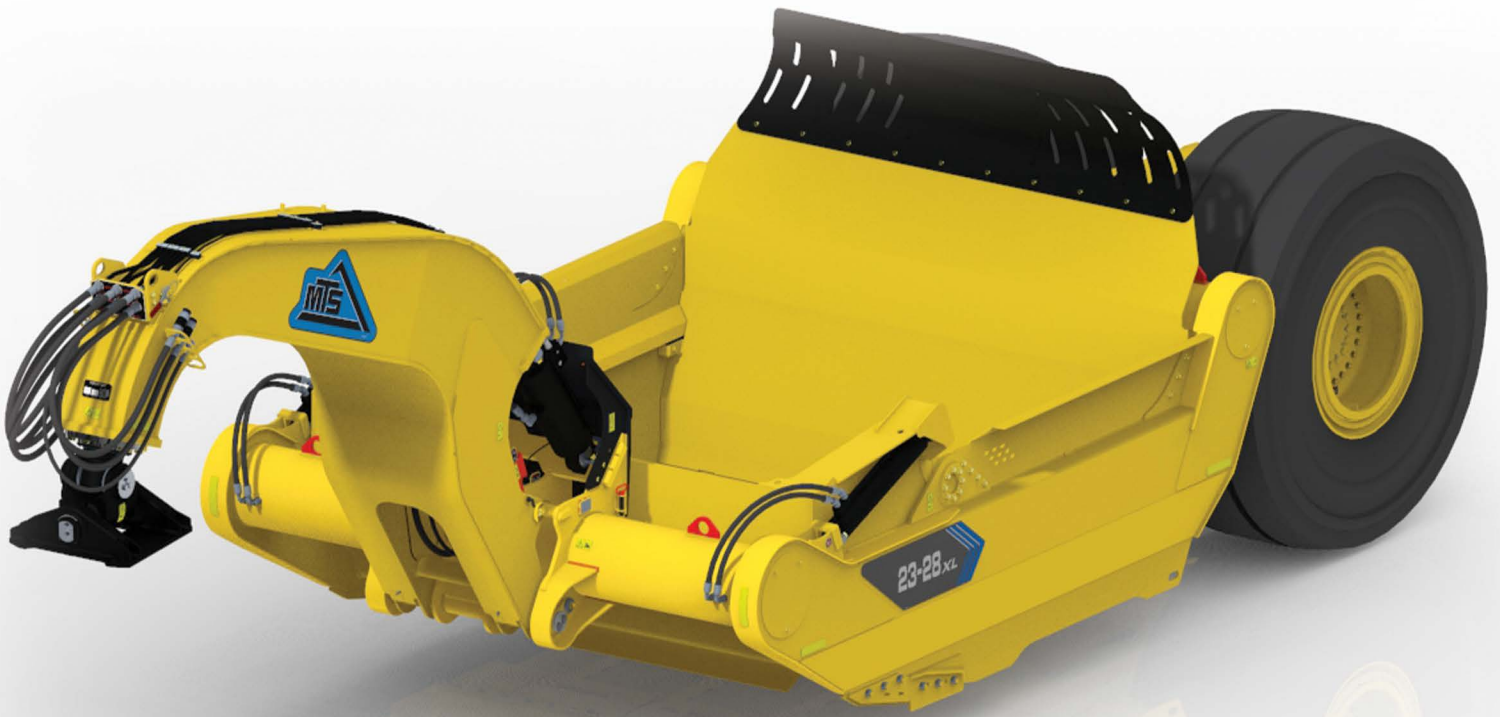

**MOBILE TRACK SOLUTIONS**  
////// TRACK FORWARD ▶▶▶▶

# SPECIFICATIONS

## 23-28XL | TRUCK/TRACTOR TOWED SCRAPER

### SCRAPER BOWL

ISO Capacity	24.4 yd <sup>3</sup>	18.65 m <sup>3</sup>
ISO Capacity - Sideracks	28.3 yd <sup>3</sup>	21.64 m <sup>3</sup>
Width of Cut, To Router Bits	135 in	3,429 mm
Capacity Struck	12.5 yd <sup>3</sup>	9.56 m <sup>3</sup>
Capacity Struck - Sideracks	17.4 yd <sup>3</sup>	13.30 m <sup>3</sup>
Max Depth of Cut	7.8 in	198 mm
Ground Clearance @ CE	24.4 in	620 mm
Apron Opening	69 in	1,753 mm

### HYDRAULICS

Bowl Cylinder Bore	8 in	203 mm
Bowl Cylinder Stroke	18 in	457 mm
Apron Cylinder Bore	4.5 in	114 mm
Apron Cylinder Stroke	25.1 in	638 mm
Ejector Cylinder Bore	6 in	152 mm
Ejector Cylinder Stroke	76 in	1930 mm

### BRAKES & TIRES

Brake Type	Dry Disk
Caliper Quantity	2
Tire Quantity	2
Standard Tires	37.25R35

### GROUND PRESSURE\*

Loaded PSI	23.1
Empty PSI	8.5

### WEIGHT DISTRIBUTION

Distribution Empty (Tongue)	30%
Distribution Empty (Axle)	70%
Distribution Loaded (Tongue)	32%
Distribution Loaded (Axle)	68%

### DIMENSIONS

Width (Inside of Bowl)	132 in	3,353 mm
4 Width (Outside Rear Tires)	133 in	3,378 mm
2 Width (Outside Bowl)	145 in	3,683 mm
Height (Floor to top of Ejector)	72 in	1,829 mm
Height (Sidewall)	36 in	914 mm
Length (Floor)	72 in	1,829 mm
5 Push Block to Axle	93 in	2,362 mm
6 Axle to Cutting Edge	171 in	4,343 mm
7 Cutting Edge to Hitch	218 in	5,537 mm
Maximum Load Rating	75,000 lbs	34,020 kg

### SHIPPING MODIFICATIONS

1 Height (Overall Shipping)	153 in	3,886 mm
2 Width (Overall Shipping)	147 in	3,734 mm
3 Length (Overall Shipping)	498 in	12,649 mm
Empty Weight	42,000 lbs	19,050 kg

