

RENTAL PACKAGE

Foreman 750 Dual Fuel Indirect Fired Heater

**TECHNICAL DATA:**


- **Length:** 94 in.
- **Width:** 32 in.
- **Height:** 53 in.
- **Total Shipping Weight:** 865 lbs.
- **Fuel Type:** Propane or NG
- **CFM:** 4,280 (Duct up to 50')
- **BTU/HR:** 750,000
- **Power Requirements:** 240 V / 60 Hz / 1 PH / 20 Amp Dedicated Circuit
- **Amps (Starting / Continuous Operation):** 38 / 12
- **Fuel Consumption:** 34.5 LBS/HR (Propane) OR 750 CU. FT/HR (NG)
- **Inlet Gas Pressure Min/Max:** 8 / 13.5 W.C. (For both Propane & NG)
- **Outlet Static Pressure:** 2.5 W.C.
- **Vent Stack Diameter:** 6 in.
- **Burner Type:** Riello
- **Motor Horsepower:** 2.0

* Based on 100% Input Capacity *

RENTAL PACKAGE

Foreman 750 Dual Fuel Indirect Fired Heater

PRODUCT DIAGRAM:

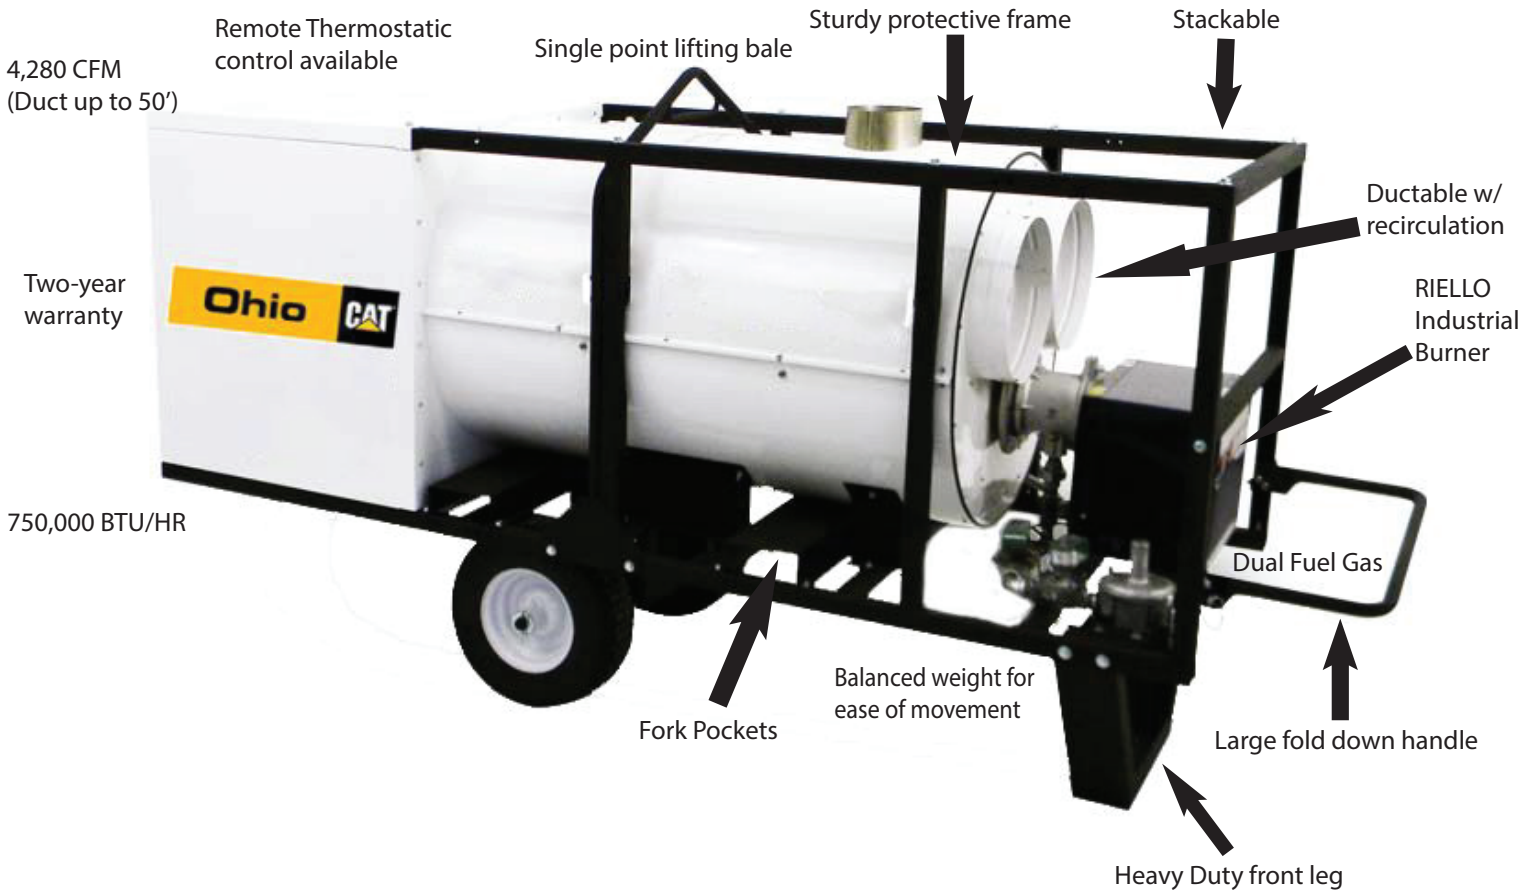

Applications:

- Job Site / Construction Heat
- General / Building Heat
- Temporary Shelter
- Industrial Heat
- Commercial / Institutional Heating

Standard Features:

- Centrifugal Fan for Low Noise & High Air Output
- Whisper Quiet, High Performance Link Belt
- Heavy-Duty, Ball-Bearing Fan for Long Blower Life
- Self-Diagnostic System
- One 16" Outlet
- 20" Air Recirculation Inlet
- US/Canadian Certification